

48
kWh/1000h

A
energy class

76
lumens/watt

Biax™ T/E LongLast™ 4-pin with Amalgam, External Starter Req.

F42W TBX/T4/830/A/4P TU

93105998

Product information

Ultra compact energy saving CFL lamps with triple-tube design give an ideal light source for small fixtures and downlighters. Biax™ T lamps allow more compact fixture designs with the same lumen output as Biax™ D lamps. They can also be used to deliver higher lumen output from existing designs. The Biax™ T & T/E lamps are electrically interchangeable with Biax™ D and D/E lamps. They are available in 13, 18, 26, 32 and 42W. Light output ranges between 900 and 3200 lumens. Biax™ T/E lamps with a 4-pin electrical connection and without an internal starter are designed for high-frequency electronic ballasts. The use of separate electronic ballasts makes them suitable for almost every kind of energy supply: high and low voltages, accumulators, batteries, solar cells and systems that can be dimmed.

Triple biaxial tubes



TUNGSRAMTM

BiaxTM T/E LongLastTM 4-pin with Amalgam,
External Starter Req.

F42W TBX/T4/830/A/4P TU

93105998

Application
areas



Office



Industrial

Product data

| | |
|------------------------------------|---------------|
| Product Code | 93105998 |
| Bulb Shape | Hex plug-in |
| Bulb maximum overall diameter [mm] | 49.3 |
| Maximum Overall Length [mm] | 163.2 |
| Net weight per piece [g] | 113 |
| Gross weight per piece [g] | 138 |
| Operating position | U - Universal |
| UV radiance | exempt |
| Brand | Tungsramp |
| Cap/Base | GX24q-4 |

Performance data

| | |
|---|----------|
| Colour Code | 830 |
| Rated Lumens [lm] | 3200 |
| Weighted energy consumption [kWh/1000h] | 47.3 |
| Energy efficiency class (EEC) | A |
| Rated Life [h] | 99999999 |
| Rated median life on electronic (HF / ECG) ballast on IEC 12-hour cycle | 20000 |
| Rated median life on electronic (HF / ECG) ballast on IEC 3-hour cycle | 17000 |
| Nominal correlated colour temperature (CCT) [K] | 3000 |
| Nominal lumens [lm] | 3200 |
| Colour Rendering Index (CRI) [Ra] | 82 |

Electrical data

| | |
|------------------------------------|------|
| Rated power [W] | 43.0 |
| Operating Temperature (MIN) [°C] | -15 |
| Starting ambient temperature range | -15 |
| Startup time [sec] | 0.1 |
| Dimming Capability | Yes |
| Nominal power [W] | 42 |
| Nominal lamp voltage [V] | 135 |

Logistic data

| | |
|--------------------------|----------------------|
| Shipment | Standard |
| DUN Code | 15994100011429 |
| EAN Code | 5994100011422 |
| Pack Quantity | 10 |
| Layer quantity | 330 EUR, 410 UK |
| Layer quantity EUR | 330 |
| Layer quantity UK | 410 |
| Pallet quantity EUR (PC) | 1980 |
| Pallet quantity UK (PC) | 2050 |
| Outer case size | 261 x 108 x 178 (mm) |
| Product status | Available |




Biax™ T/E LongLast™ 4-pin with Amalgam,
External Starter Req.


F42W TBX/T4/830/A/4P TU

93105998

Technical drawing

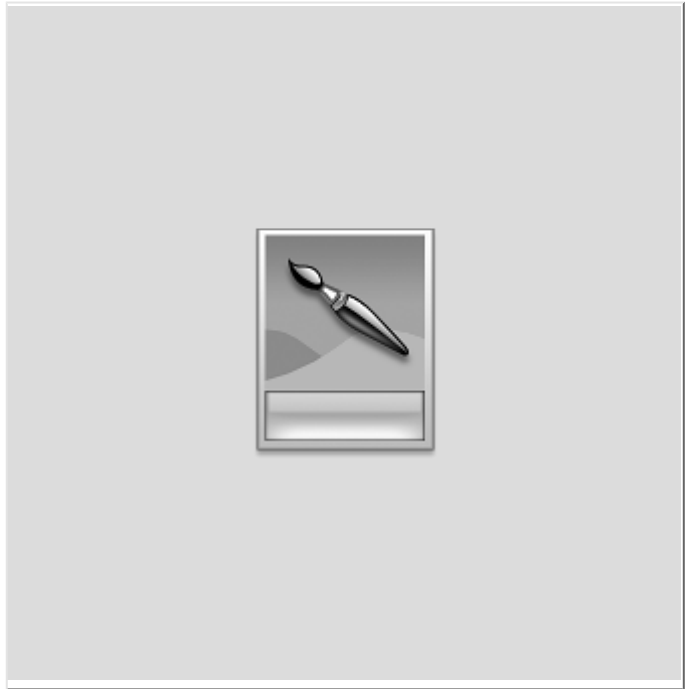

Survival data

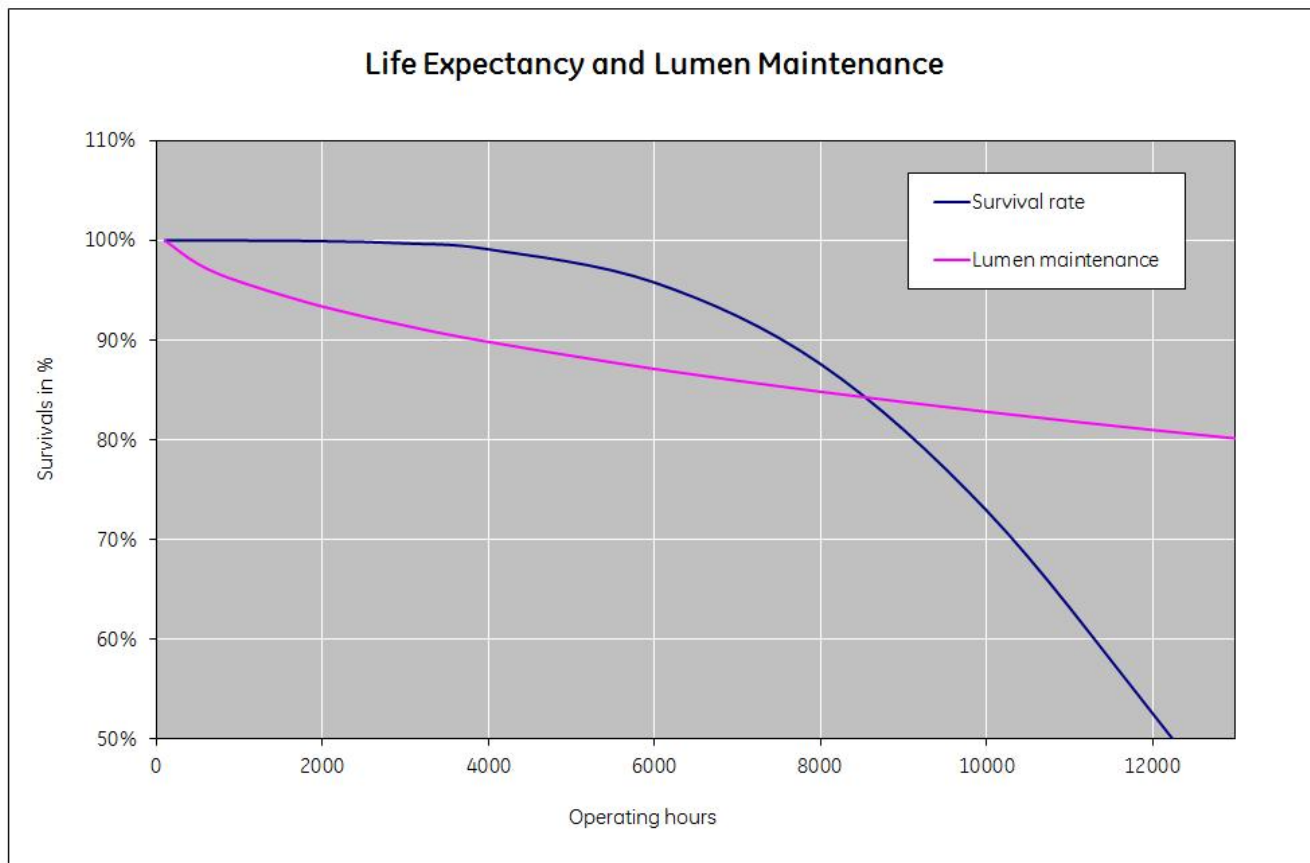

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[CFL Non-Integrated Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)